


NOTES:

1. INSTALL 1/2" ϕ X 18" SMOOTH DOWELS @ 18" (GREASE ON ONE SIDE) THROUGH EXPANSION JOINTS.
2. 20:1 SLOPE ON WHEELCHAIR RAMP AND 12:1 SLOPE ON RAMP WINGS.
3. RAMPS SHALL HAVE A HEAVY BROOM FINISH WITH GROOVES ALIGNED PERPENDICULAR TO THE DIRECTION OF TRAVEL.
4. ALL RAMPS SHALL COMPLY WITH THE REQUIREMENTS OF THE ARCHITECTURAL BARRIERS ACT.
5. CONCRETE FOR RAMPS SHALL BE MINIMUM 3,600 PSI @ 28 DAYS.

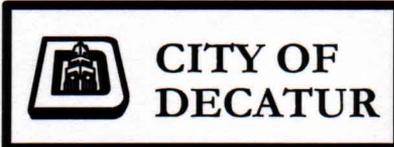

PAVING CONSTRUCTION DETAILS
WHEELCHAIR RAMP

REVISED OCT 2001
SCALE: 1" = 4'
SHEET: **P-8**