


## SAW JOINT

### NOTE:

1. ALL DOWEL BARS SHALL BE INSTALLED PERPENDICULAR TO JOINT @ 18" SPACING.
2. SILICONE JOINT SEALANT SHALL BE DOW CORNING 890 SL, OR APPROVED EQUAL.

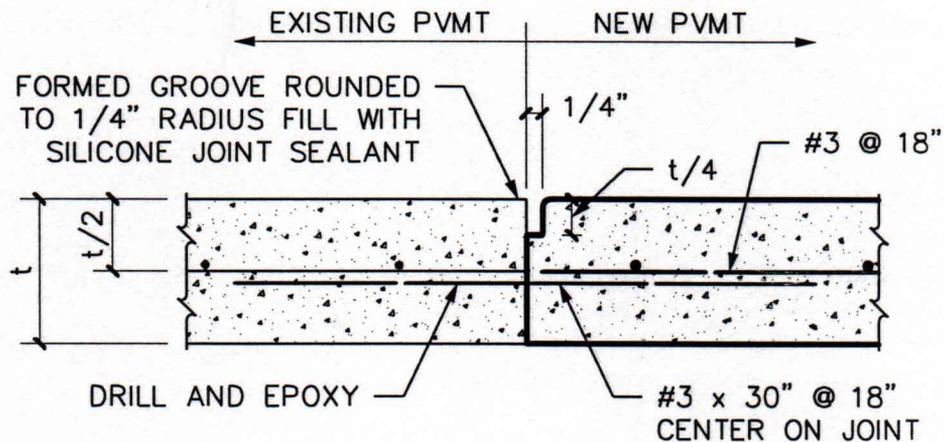

## SAWED CONSTRUCTION JOINT



CITY OF  
DECATUR

PAVING CONSTRUCTION DETAILS  
CONCRETE PAVEMENT JOINTS

REVISED MAR 2000

SCALE: N.T.S.

SHEET: P-11A