


## EXPANSION JOINT

### NOTE:

1. ALL DOWEL BARS SHALL BE INSTALLED PERPINDICULAR TO JOINT @ 18" SPACING.
2. SILICONE JOINT SEALANT SHALL BE DOW CORNING 890 SL, OR APPROVED EQUAL.

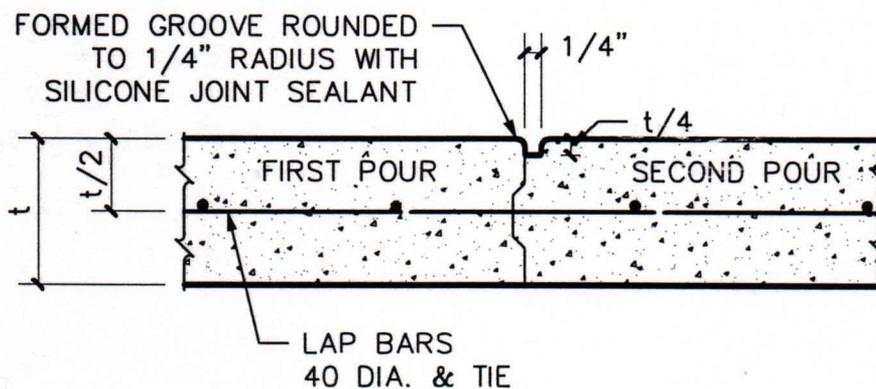

## CONSTRUCTION JOINT



**CITY OF  
DECATUR**

PAVING CONSTRUCTION DETAILS  
CONCRETE PAVEMENT JOINTS

REVISED MAR 2000

SCALE: N.T.S.

SHEET: **P-11B**